




THE WORLD'S LEADING MANUFACTURER OF LABEL DISPENSERS,
REWINDERS, UNWINDERS, SLITTERS & COUNTING SOLUTIONS

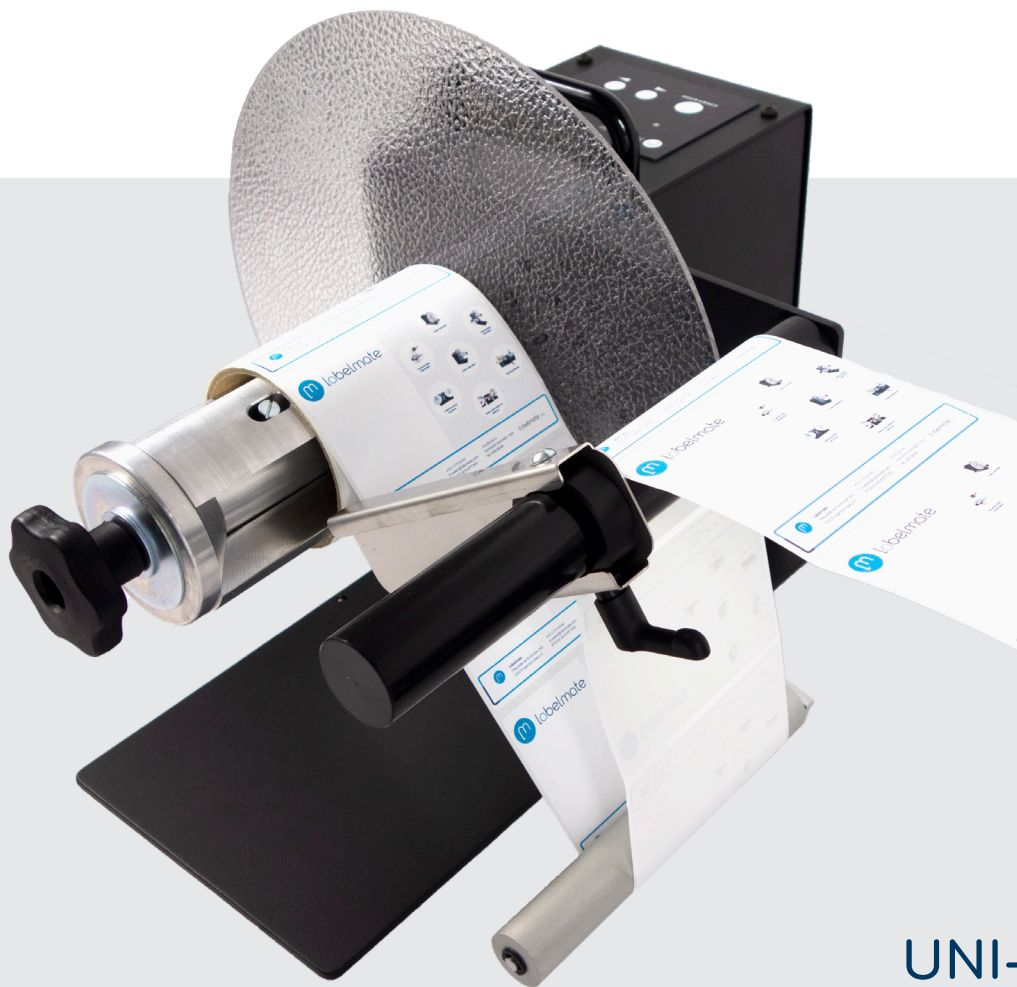

UNI-CAT



labelmate.com

Uni-Cat

UNIVERSAL & INTELLIGENT UNI-CAT

The new UNI-CAT is the smartest and most “UNI-VERSATILE” rewinder/unwinder in the Labelmate product range ! With various core sizes, label widths, roll diameters and options to choose from, there is a rewinder/unwinder to fit any job you may have. The new UNI-CAT replaces all CAT-3-TA models (with Tension Arm) and CAT-4 models.

- ✓ Self-teaching to work as rewinder or unwinder
- ✓ Supports back-feed process for colour inkjet & tension sensitive printers
- ✓ Auto-Speed Adjustment to align with printer speed
- ✓ Speed up to 80cm/s to work with the fastest barcode printers available
- ✓ Bi-Directional for internal & external winding
- ✓ New maintenance free, soft-touch control panel with LED-Status-Indicators

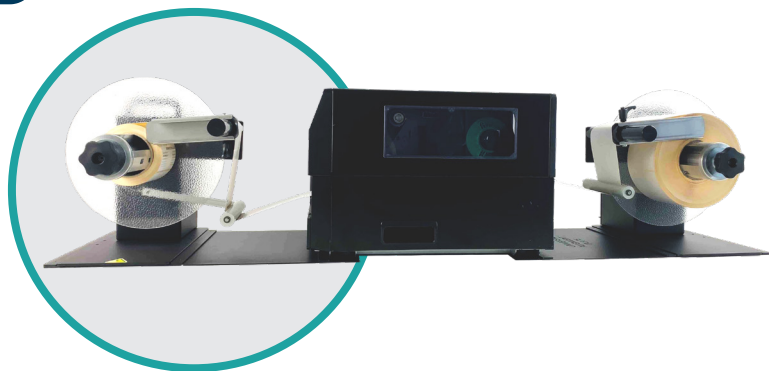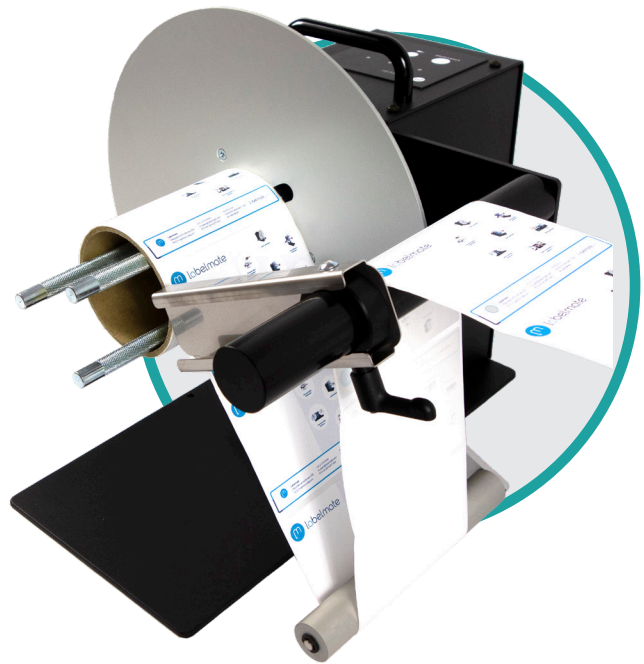

FEATURES

- Seamlessly detecting & following printer activity: rewinding, idle and unwinding
- UNI-CAT-3-Standard has a Vane-style core Holder
- UNI-CAT-3-ACH employs an adjustable core holder enabling the use of varying core sizes, for maximum flexibility
- UNI-CAT-3-CHUCK includes a quick-locking “Quick-Chuck” permitting the fastest loading and unloading of cores and label rolls
- CHUCK/STANDARD/10-INCHES models come standard for using cores in 76mm. On request available in 38/40/44/70 mm. See product catalogue for configuration
- ALL models come with paper guide for straight and tight label rolls, no flanges needed

UNI-CAT-MODELS

| P/N | MODEL | DESCRIPTION | MAX LABEL WIDTH | MAX ROLL DIAM | MAX WEIGHT |
|---------------|-------------------|---|-----------------|---------------|--------------|
| LMR042 | UNI-CAT-STANDARD | Standard for 76mm cores (38/40/44/50/70/100mm available) | 155 mm | 300 mm | 8 KG |
| LMR043 | UNI-CAT-ACH | Adjustable Core Holder for using any core diameter between 25 & 101 mm. | 155 mm | 280 mm | 7 KG |
| LMR045 | UNI-CAT-10-INCHES | Standard for 76mm cores (38/40/44/50/70mm available) | 255 mm | 300 mm | 10 KG |
| LMR046 | UNI-CAT-1-INCH | For 25,4mm cores | 155 mm | 220 mm | 8 KG |
| LMR044 | UNI-CAT-CHUCK | Easy-Loading Quick- Chuck for 76mm cores (38/40/44/70mm available) | 170 mm | 300 mm | 10 KG |
| LMR044/LMX484 | UNI-CAT-CHUCK | Easy-Loading Quick- Chuck for 76mm cores | 220 mm | 300 mm | 10 KG |
| LMR044/LMX485 | UNI-CAT-CHUCK | Easy-Loading Quick- Chuck for 76mm cores | 270 mm | 300 mm | 10 KG |
| LMR047 | UNI-CAT-R16 | Easy-Loading Quick-Chuck for 76mm cores and 400 mm rolls | 170 mm | 400 mm | 10 KG |
| LMR049 | UNI-CAT-XL* | Easy-Loading Quick-Chuck for 76mm cores and 400 mm rolls | 170 mm | 400 mm | 14 KG |
| LMR049/LMX484 | UNI-CAT-XL* | Easy-Loading Quick-Chuck for 76mm cores and 400 mm rolls | 220 mm | 400 mm | 14KG |
| LMR049/LMX485 | UNI-CAT-XL* | Easy-Loading Quick-Chuck for 76mm cores and 400 mm rolls | 270 mm | 400 mm | 14 KG |



10-INCHES



1-INCH



UNI-CAT-STANDARD



UNI-CAT-ACH



UNI-CAT-CHUCK

UNI-CAT-OPTIONS

| P/N | DESCRIPTION |
|--------|--|
| LMX602 | ALIGNMENT PLATE for EPSON C6000 & C6500 |
| LMX579 | UNIVERSAL- ALIGNMENT PLATE for any desktop Thermal Transfer and Inkjet color printer |
| LMX580 | ALIGNMENT PLATE for EPSON C7500 |
| LMX566 | ALIGNMENT PLATE for ASTRO-QL-300 and OKI PRO1040 |
| LMX577 | ALIGNMENT PLATE for ASTRO QL-120 |
| LMX492 | 10-Inches shaft with vanes, internal and external flanges. |
| LMX500 | Adjustable Core Holder for any core size from 25 to 101mm |
| LMX501 | For rewind on shaft. No core is needed. |
| LMX502 | For rewind on 10-inches shaft. No core is needed |
| LMX546 | 1 Inch shaft with vanes, internal and external flanges |
| LMX491 | Standard shaft with vanes, internal and external flanges |

DIMENSIONS


- UNI-CAT-STANDARD: W x D x H:300 x 350 x 320 mm
- UNI-CAT-CHUCK: W x D x H:300 x 385 x 320 mm
- UNI-CAT-ACH: W x D x H:280 x 310 x 310 mm
- UNI-CAT-10-INCHES: W x D x H:300 x 455 x 320 mm
- UNI-CAT-1-INCH: W x D x H:220 x 350 x 280 mm
- Shipping Weight: Circa 14 KG, depending on configuration

GENERAL

- Power Supply: 100-240V- 50Hz, Output 15VDC-4,33A
- Limited Warranty of 2 Years, extendable to 5 Years, 1 Year on the Power Supply



Your local partner:



+32 2 375 69 60

brussels@labelmate.com

Bergensesteenweg 78
1651 Lot (Belgium)

www.labelmate.com